

ELKO COMBO



Project:	
Type:	
Catalog #:	

STANDARD	OPTIONAL



ILLUMINATION

- Long lasting, efficient ultra bright white LED lamp heads.
- 1.0 watt (8 LEDs x 0.125W) per head.
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provides optimal center-to-center spacing.
- Long life, energy efficient Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out Chevron directional indicators.


OPTIONS

- RC: Remote capacity of up to 3.0 watts.
- HL: 12-LED heads provide increased center-to-center spacing (1.5W per head).
- NH: No lamp head attach to the unit enabling it to be used as remote capable exit sign.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- Custom: Signs available with requested "special" wording.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 40°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

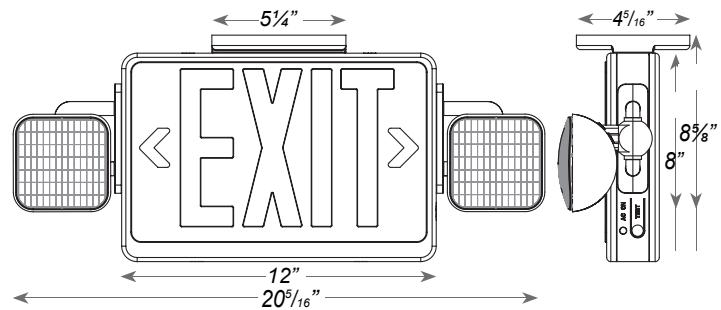

ORDERING INFORMATION

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
ELK-C	T Universal Single/Double Face	RD Red	WH White	RC Remote Capacity
		GN Green	BK Black	HL High Lumen No
				NH Lamp Heads
				SDT Self-Diagnostics
				CUSTOM Custom Wording