



RETROFIT LED Retrofit Kits

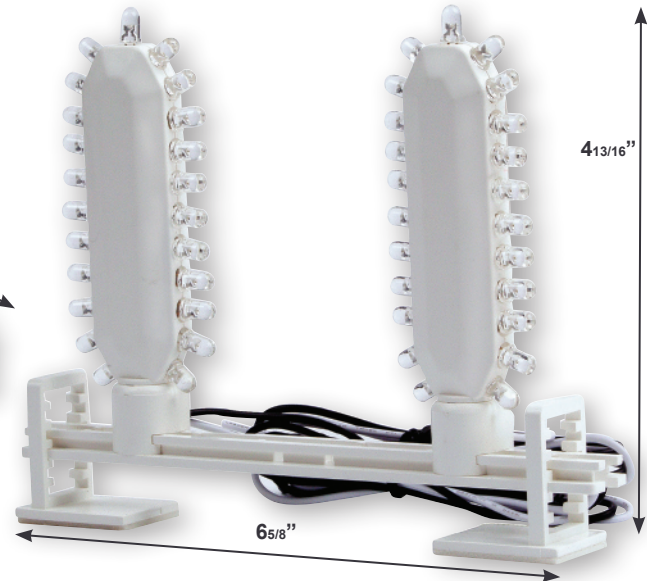

Project:	
Type:	
Catalog #:	

SCREW-IN KIT

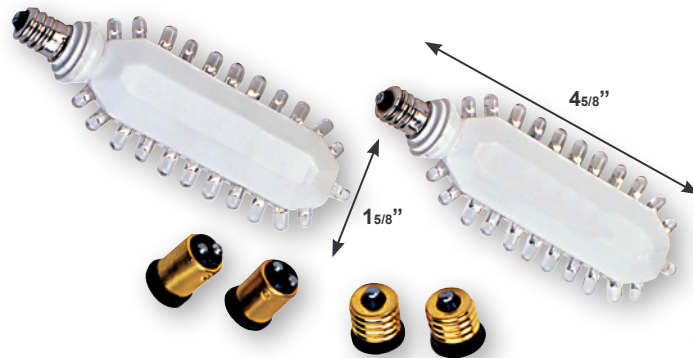

HARD WIRE KIT

STANDARD



ILLUMINATION

- Kits easily convert incandescent exit signs to energy efficient LED Exit signs.
- Ultra bright, long-life red or green LED.

ELECTRICAL

Hard wire:

- Dual 120/277 voltage.
- Energy usage of 2.8W per kit.

Screw-in:

- 120V only.
- Energy usage of 2.8W per kit.

MOUNTING

- Hard wire kits come complete with mounting bracket and double-sided tape for easy installation.
- Screw-in kits are supplied with socket adapters for installation in signs with bayonet, intermediate or candelabra bases.

WARRANTY/LISTING

- Five year warranty.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Code.

Energy Efficient: LEDs use a fraction of the wattage of incandescent bulbs!

	Incandescent EXIT	EXIT replaced with Green LED Retrofit Kit	EXIT replaced with Red LED Retrofit Kit
EXIT Energy Usage	30W (Two 15W lamps)	1.4W (Two 0.7W LED lamps)	2.8W (Two 1.4W LED lamps)
Hours ON per year	24 x 365 = 8760 hours	24 x 365 = 8760 hours	24 x 365 = 8760 hours
Price per KiloWatt Hour	\$0.09/KWhr	\$0.09/KWhr	\$0.09/KWhr
Energy Usage per Year	262,800 Watts	12,264 Watts	24,528 Watts
Dollars Spent per Year	\$23.65	\$1.10	\$2.21
ENERGY SAVINGS PER YEAR	-	250,536 WATTS	238,272 WATTS
SAVINGS PER YEAR	-	\$22.55	\$21.44

*Example based on 9¢/KWhr

ORDERING INFORMATION

Model	Kit
FRFXTE-1	Red Hardwire Kit
FGFXTE-1	Green Hardwire Kit
FRFXTE-3	Red Screw-in Kit
FGFXTE-3	Green Screw-in Kit

Sample Part Number: **FRFXTE-3**