

Project:	
Type:	
Catalog #:	




## SPECIFICATIONS: INTERNAL

The TEC2 has a 120/277V input. The maintenance free, sealed nickel cadmium batteries provide a minimum 90 minutes of emergency duration. Optional 120 minutes duration battery is available. Solid state charger, auto-test, and transfer are standard on self powered units. The self powered version comes standard with an external LED status indicator and test switch.

## SPECIFICATIONS: EXTERNAL

The TEC2 is constructed from .420" thick, heavy duty cast aluminum. The faceplates are protected by high abuse clear polycarbonate, which is recessed into the housing. Tamper resistant screws are standard. The TEC2 comes finished in either black or white, with matching stencil faces. Single, double or universal face versions must be specified.

## DIMENSIONS (in,mm)

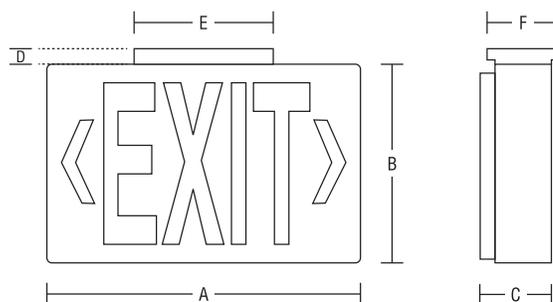

Series	A	B	C	D	E	F
FTZ	14"	9"	2.5"	1"	6.25"	6.13"
	356mm	229mm	64mm	25.4mm	158.75mm	155.7mm

Series	Model	LED	Face No.	Mounting	Options
TEC2	A (AC only)	R (red)	1 (single)	U (universal mount)	AT (autotest - available for SA model only)
	B (self-powered)	G (green)	2 (double)		FL <sup>1</sup> (flashing alarm)
			U (universal)		PK (pendant kit- specify length)
					WW (white housing/white face)
					BB (black housing/black face)
					SW <sup>2</sup> (special wording- specify)
					FAI (fire alarm interface)
					2CK (dual-circuit - HT only)
					120SA (120 minute emergency)
					IH <sup>1</sup> (internal heater)
					LC (line cord)
					120 VDC

NOTE 1: Available for SA models only with AT option. Specify voltage.

NOTE 2: For the BLACK OUT feature specify (BO) after the special wording (SW) option.

NOTE 3: Available for SA models only with AT option. Specify voltage. Specify type- open/closed dry contact.

