BL9 Series

2X2 / 2X4 Color / Wattage Tunable Back-lit Panel

Project:	
Type:	
Catalog #:	

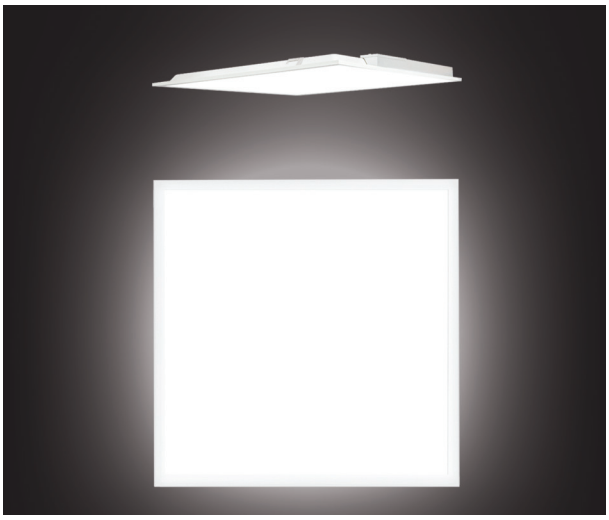

Features

Sizes	2x2 and 2x4
Finish	Pure White Satin
Diffuser	Anti-UV Frosted Polycarbonate Lens
Rated Life	75000 hours
Warranty	7 years

Construction

Manufactured for weather-proof durability using heavy duty die cast aluminum housing with anti-UV polyester coating to resist corrosion, discoloration, and scratching.

Applications

Primary use as 2x2 and 2x4 luminaires for ambient lighting of interior commercial spaces. Intended to provide ambient lighting in settings such as office spaces, schools, retail stores, and other commercial environments.

Listings

DLC Premium listed. UL certified to meet US and Canadian standards. FCC, CE and RoHS compliant. View DLC Premium listing at: *designlights.org/qpl*

Warranty

7 year exclusive limited warranty.

Performance

Wattage	Tunable (30 W, 35 W, or 40 W)
Voltage	120-277V
Frequency	50/60 Hz
Efficacy	130 lm/W
CCT	Tunable (3500K, 4000K, or 5000K)
CRI	81.5
Power Factor	≥ 0.94
THD	11%
Operating Temp.	-20°C to 40°C (-4°F to 104°F)
Dimming	0-10V

ORDERING INFORMATION

Model No.	Size	Wattage (W)	Voltage (V)	CCT (K)	Light Output	Efficacy (lm/w)	Rated Life
BL922-40W	2x2	30	120-277V	3500K, 4000K, 5000K	3900 lm	130 lm/W	75000 hrs
		35	120-277V	3500K, 4000K, 5000K	4550 lm	130 lm/W	75000 hrs
		40	120-277V	3500K, 4000K, 5000K	5200 lm	130 lm/W	75000 hrs
BL924-40W	2x4	30	120-277V	3500K, 4000K, 5000K	3900 lm	130 lm/W	75000 hrs
		35	120-277V	3500K, 4000K, 5000K	4550 lm	130 lm/W	75000 hrs
		40	120-277V	3500K, 4000K, 5000K	5200 lm	130 lm/W	75000 hrs