

Project:	
Type:	
Catalog #:	



3,250-9,750 LUMENS

Description:

Input Voltage/ Frequency : AC100-277V 50/60Hz

Installation : Mounting bracket or hanging with suspension chain

Housing : Injection molded, high mechanical resistant, RAL7035 light gray Polycarbonate.

Diffuser : Injection molded, high mechanical resistant, UV stabilized Polycarbonate,

Driver(0-10V Dim) : MEANWELL

LED Brand : SMD2835 LG

CRI: >80

Power Factor : PF>0.95

Beam angle : 120°


IPrating : IP66

Warranty : 5 years

Operating temp range : -30°C-40°C

Certifications : UL 1598 || CSA C22.2 NO. 250.0-08 || CSA C22.2 NO. 250.13-14 (LED) ||

NSF

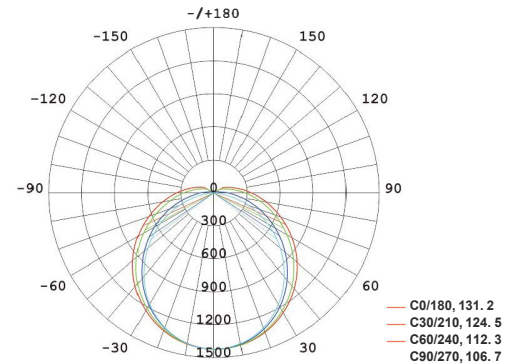

Specifications:

Model No.	ETZ-25W	ETZ-40W	ETZ-50W	ETZ-60W	ETZ-75W
Power	25W	40W	50W	60W	75W
Lumen Output	3,250 lm	5,200 lm	6,500 lm	7,800 lm	9,750 lm
CCT	2700-5700K (ANSI C78.377)				
N.W. / G.W.	1.5KG/1.7KG	2.6KG/2.8KG		3.2KG/3.5KG	
Product Size	2'	4'		5'	
Carton Size	685x270x415 mm	1255x235x270 mm		1595x235x270 mm	
Qty/Ctn	6	4			

Ordering:

MINIMUM ORDER QUANTITY : 10 pcs

Model	Wattage	CCT	Voltage	Clips	Mounting
ETZ	25W	S = 3000K	LV = 120-277V	A = Polycarbonate	SM = Surface Mount
	40W				
	50W	I = 4000K		B = Stainless Steel	CM = Cable Mount
	60W	C = 5000K			
	75W				