

PHOTOMETRIC DATA

FWP-B-5K

Luminaire Data

Description	Full Cutoff Wall pack 9L, 5K
Total Lumens	9,053
Input Wattage	74
Efficacy (lm/W)	122
Max. Cd.	3167.6 (360H, 3V)
IES Classification	Type VS
Longitudinal Classification	Very Short


Zonal Lumen Summary

Zone	Lumens	%Fixt
0-30°	2,525	27.9%
0-60°	7,531	83.2%
0-80°	9,003	99.4%
80-90°	39	0.4%*
0-90°	9,042	99.9%
90-110°	1	0.0%
110-180°	0	0.0%
0-180°	9,053	100.0%

Luminaire Classification Systems (LCS)

LCS Zone		Lumens	%Lum
FL	0-30	1,265	14.0%
FM	30-60	2,504	27.7%
FH	60-80	729	8.0%
FVH	80-90	20	0.2%
BL	0-30	1,260	13.9%
BM	30-60	2,501	27.6%
BH	60-80	744	8.2%
BVH	80-90	20	0.2%
UL	90-100	0	0.0%
UH	100-180	10	0.1%
Total		9,053	99.9%
BUG Rating		B3-U2-G1	

180° Polar Graph

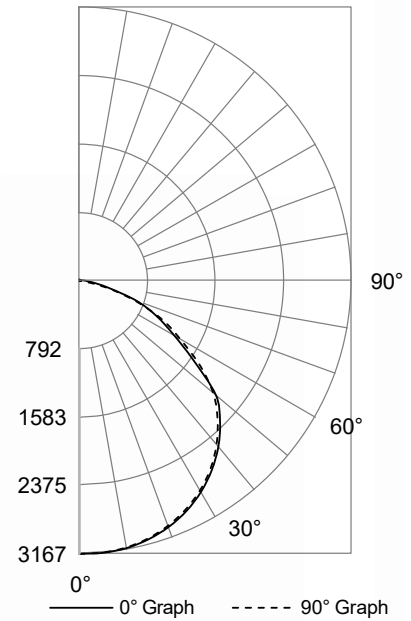

* 80-90° glare zone is calculated by dividing the lumens in that zone by the lumen total in the 0-90° zone