

Project:	
Type:	
Catalog #:	



STANDARD



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

U.S. Patent No.#'s:
9,990,868
D825,003

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.


MOUNTING

- Mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Specification-grade, low profile thin plastic design.
- EZ snap-out Chevron directional indicators.
- Patented, field selectable universal single / double face configuration.

DIMENSIONS

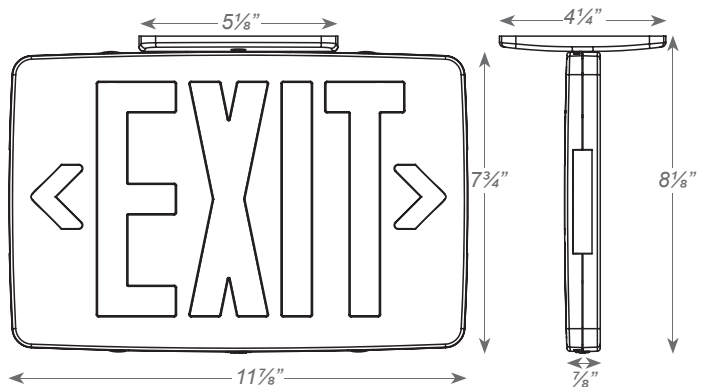

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
ETXTEU	1.0	1.0	0.10	0.10

ORDERING INFORMATION

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY
ETXTEU	3	R Red	W White	(blank) AC-Only
		G Green	B Black	EM Battery Backup