


Project:	
Type:	
Catalog #:	

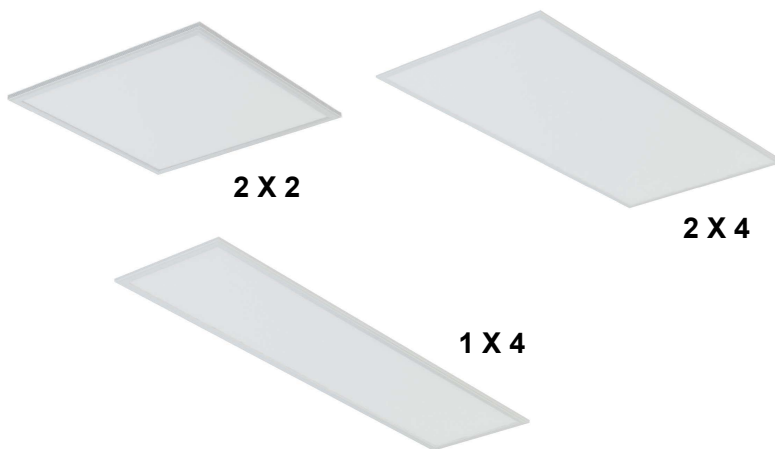


KEY FEATURES

•DLC 4.4 Premium

- Full Range cULus&cETLus edge light panel, 2x2 , 1x4,2x4
- SDCM<4
- 130lm/w (premium)
- AC100-277V, 347V, 0-10V dimming; flicker-free optional
- Emergency back up driver
- LM79 & LM80 report available
- Rated for damp locations
- Mounting options: Lay-in for T-grid, drop-ceilings, Suspension cables
- 5 year warranty
- Microwave Sensor
- Emergency Battery
 - UL Approved
 - Charging Time: 24hr
 - Back-Up Time: 90min
 - Power: 8W
 - Shake Proof Clips

MOUNTING OPTIONS

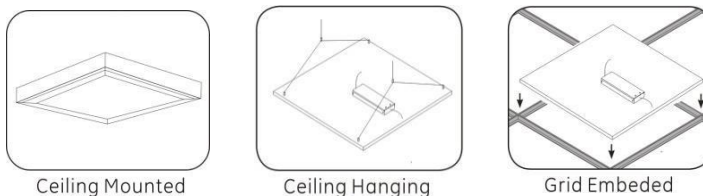

Size	Watts	Efficiency	Lumen	LED Qty	Current	Output Voltage	Driver type
2x2 FT	30W	130Lm/W	3750lm	234	700mA	DC27-42v	0-10V dimming AC100-277V PF>0.9
	36W		4500lm	286	850mA	DC27-42v	
1x4 FT	36W		4500lm	312	850mA	DC27-42v	
2x4 FT	40W		5000lm	338	950mA	DC27-42v	
	48W		6000lm	390	1150mA	DC27-42v	
	60W		7500lm	468	1400mA	DC27-42v	

ORDERING INFORMATION

MODEL	SIZE	WATTAGE	CCT	OPTIONS
PLF	A 2X2	30 30W	I 4000K	EM Battery Backup
	B 1X4	36 36W	C 5000K	MS Microwave Sensor
	C 2X4	40 40W		
		48 48W		
		60 60W		