

Project:	
Type:	
Catalog #:	





FEATURES

- Die cast aluminum housing and high impact polycarbonate diffuser
- Compliance to UL844 Class I Division 2, Groups A,B,C,D. Class Division 2 Groups F,G. Class III. CSA C22.2 No 137
- Operation Temperature -40°C ~ +55°C

SPECIFICATIONS

PERFORMANCE

Watts	60W
LED Chip	Lumileds
Lumens	8,855.93LM
LPW	149.25 lm/W
Input Voltage	120-277V
CCT	5000 K
CRI	≥70
Dimming	none
Power Factor	≥0.9
THD	≤ 20%
Beam Angle	Type 4-Short
Housing	Diecast Aluminum ADC12
Finish	Powder coat
Surge Protection	4KV (option 6KV)
IP Rating	IP65
Distribution	Type 4

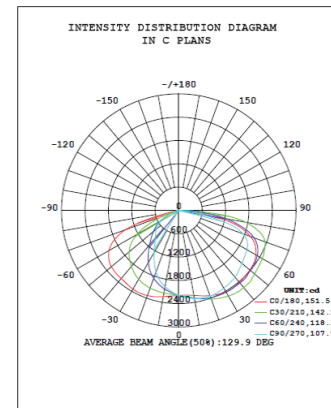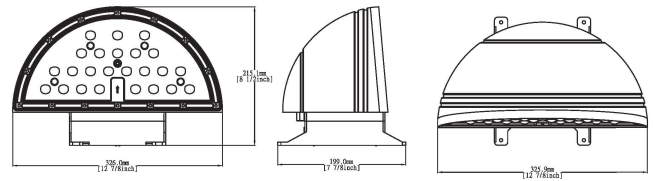

ORDERING INFORMATION

Product Series	Wattage	Voltage	CCT	Finish	I
WPXP	6 = 60W	LV = 100-277V	3 = 3000K 4 = 4000K 5 = 5000K	Black White Brown Orange Yellow	