



BAA and TAA available. Contact factory for more information and pricing.

Project:	
Type:	
Catalog #:	



Hazardous Location LED Luminaire

FME Earth-Series

Product description

The EARTH Series LED Luminaire can be used in locations made hazardous by the presence of flammable vapors or gases or combustible dusts as defined by the NEC. The EARTH Series is rated for Class 1, Division 1; Class 1, Division 2; Class 2, Division 2; Class 3 applications. The copper free cast aluminum housing allows for cool operating temperatures.



Features

- High efficacy: up to 140lm/W
- Color temperature: 3000K, 4000K, 5000K, 6000K
- Variable optics 40° 60° 90° 120° for uniform illumination
- Copper free aluminum
- High vibration resistance
- Low maintenance costs
- Dimmable and battery back up function available.
- 5 or 10 year limited warranty option.
- Standard 2ft cable out of 3/4" threaded hub on top of fixture
- Trunnion Mount (Wall, Ceiling & Floor) Standard
- **Housing:** A383 Die Cast Aluminum
- **Gasketing:** Fluorosilicone Rubber
- **Hardware:** Stainless Steel 304
- **Finish:** Polyester Powdercoat
- **Lens:** Tempered Glass or Polycarbonate Lens
- **Expected Life:** Over 85,000 hrs.
- **Rating:** IP66 & IK10
- **Color Rendering Index (CRI):** 70
- **Operating Temp:**
 - 20-150W: -40°C to +55°C
 - 180-200W: -40°C to +45°C
- **Relative Humidity:** 0-90% RH
- **Power Factor:** >.95
- **Input Line Voltage:**
 - 90-305
 - 200-525 VAC
- **Input Line Frequency:** 50/60 Hz
- **LED Chips:** Philips
- **Driver:** Meanwell
- **Surge Protection:** 10KV
- **DC Output Ripple & Noise:** <200mVP-P
- **T-Rating:** T4

Compliance

UL 844 Hazardous Locations North America

- Class I, Division 1, Groups C,D
- Class I, Division 2, Groups A,B,C,D
- Class II, Division 1, Groups E,F,G
- Class II, Division 2, Groups E,F,G
- Class III

Marking Marine


- UL1598A
- ABS

Other Markings / Standards

- IP66
- IK10

Applications





- Power Plants / Heavy Industrials Storage Facility
- Paper Mills / Wastewater Treatment Plants
- Loading Docks / Platforms / Shipyards
- Chemical Processing Facility
- Petrochemical Processing Facility
- Mining
- Ocean Marine
- LNG facilities
- Metal Industry

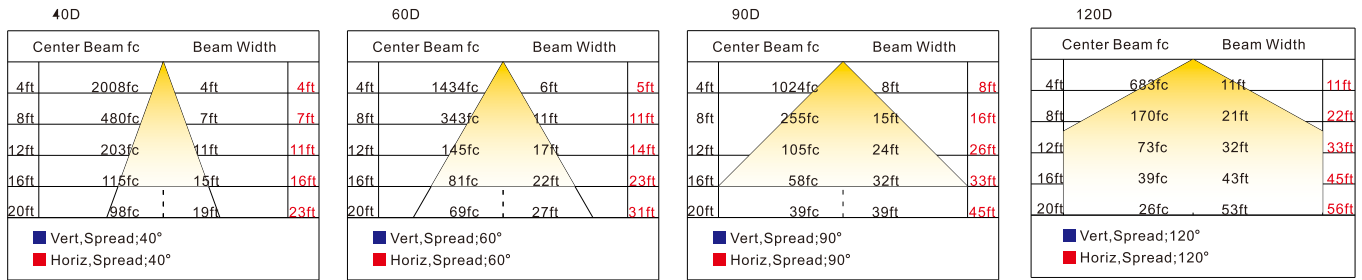

Product Dimensions

20W - 40W - 60W - 80W

100W - 150W - 180W - 200W




Lumen Chart

	3500K	4000K	5000K
20W	2,400 lm	2,560 lm	2,800 lm
40W	4,800 lm	5,120 lm	5,600 lm
60W	7,200 lm	7,680 lm	8,400 lm
80W	9,600 lm	10,240 lm	11,200 lm
100W	12,000 lm	12,800 lm	14,000 lm
150W	18,000 lm	19,200 lm	21,000 lm
180W	21,600 lm	23,040 lm	25,200 lm
200W	24,000 lm	25,600 lm	28,000 lm
200W			30,800 lm


Mounting Accessories

Hazardous Location LED Luminaire


OPEB: Junction Box




OPWA25: 25° Wall Mount & Junction Box




OPWA90: 90° Wall Mount & Junction Box




OPWA: 90° Wall Mount




OPPS25: 25° Pole Mount



OPPS90: 90° Pole Mount



Ordering Information

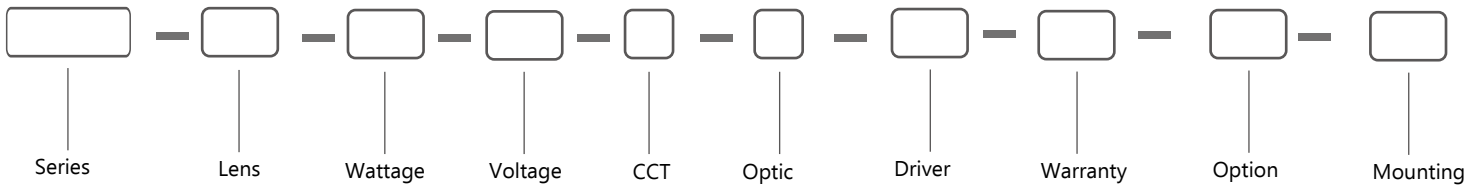

SERIES	LENS	WATTAGE	VOLTAGE	COLOR TEMP	OPTIC	DRIVER
FME-EAT	G = Glass Lens P = Polycarbonate Lens	2 = 20W 4 = 40W 6 = 60W 8 = 80W 10 = 100W 15 = 150W 20 = 200W 22 = 220W	A = AC100-277V B = AC200-480V C = 12-48VDC	S = 3000K I = 4000K C = 5000K K = 6000K	M = 40° N = 60° O = 90° P = 120°	D = 0-10V Dimming ND = No Dimming

WARRANTY

5Y = Five Year Warranty
10Y* = Ten Year Warranty*

*Please contact factory for 10yr warranty option

OPTION

EM = Emergency Battery Backup

S = Sensor

BAA** = Buy American Act Compliant**

TAA** = Trade Agreements Act Compliant**

**Please contact factory for BAA and TAA options.

MOUNTING / ACCESSORIES

OPEB = Junction Box

OPCM = Ceiling / Surface Mounting & Junction Box: 3/4" NPT**

OPWA = 90° Wall Mount**

OPWA25 = 25° Wall Mount & Junction Box: 3/4" NPT **

OPWA90 = 90° Wall Mount & Junction Box: 3/4" NPT**

OPPS25 = 25° Pole Mount: 1-1/2" NPT**

OPPS90 = 90° Pole Mount: 1-1/2" NPT**

NOTES

- 20W, 40W, 60W & 80W Only Available in A 110/277V
- *35K Available; Please Consult Factory for Lead Times
- **Mounting Not Available in 100W, 150W, 180W & 200W