


Project:	
Type:	
Catalog #:	



## FEATURES

- Available in 3000k (warm white), 4000k (neutral white), and 5000k (cool white) color temperatures.
- Long-life LEDs provide at least 70% of initial lumen output ( $L_{70}$ ) for 50,000 hours of operation.\*\*
- LED-FSP-WH4 provides 530 nominal lumens and LED-FSP-WH6 provides 1,030 nominal lumens.
- LED-FSP-WH4 = 11 nominal watts and LED-FSP-WH6 = 16 nominal watts.
- Color rendering index ( $R_a$ ) > 90.
- Universal 120-277 (50-60Hz) AC voltage is standard.
- Power factor  $\geq 0.90$ .
- Total harmonic distortion < 20%.
- Dimmable down to 10% with most line voltage dimmers (120V only).
- Painted steel housing.
- Easy installation in new construction or remodel applications. Equipped with torsion springs.
- For use with insulated ceilings (Type IC).
- Compatible with 4.38"-6.62" square ceiling cut-outs.
- This device is not intended for use with emergency exits.

## DIMENSIONS

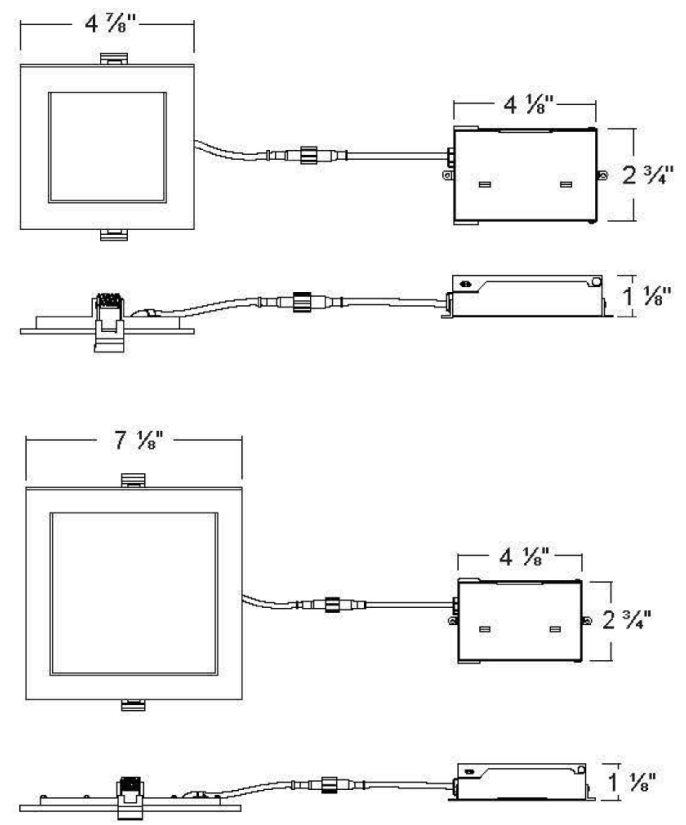

## WARRANTY & LISTINGS

- cULus listed for wet locations.
- Energy Star qualified.
- Complies with FCC Part 15, class A.
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.

\* Contact factory for other color temperatures and lumen packages.  
 \*\*  $L_{70}$  hours are IES TM-21-11 calculated hours.

## ORDERING INFORMATION

Series	Size		Color Temperature		Accessories (Order Separately)	
	DLB-S	WH4	4"	3K	3000K	BL4FSP-MP
	WH6	6"	4K	4000K	BL6FSP-MP	6" mounting plate - square
			5K	5000K		