

<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	

### STANDARD



### OPTIONAL

## ILLUMINATION

- Two fully adjustable, ultra bright 3.3 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.

## ELECTRICAL

- Powered from low voltage 6V/12V DC power source with low voltage wiring (not provided).

## MOUNTING

- Die-cast mounting brackets provided for surface wall-mount installation.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.

## HOUSING

- Housing is fiberglass reinforced construction in gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.

## OPTIONS



- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.



## WARRANTY / LISTING

- Five year warranty.
- UL listed
- IP66 rated for Ingress protection.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Rated for Class 1, Division 2, Groups A, B, C, and D.

## DIMENSIONS

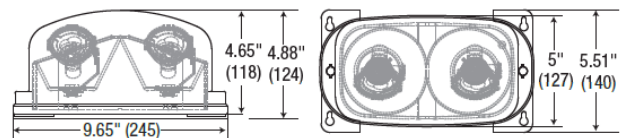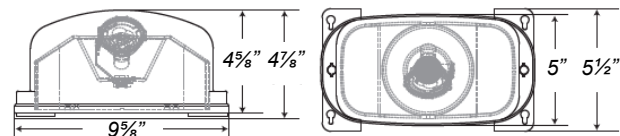

## ORDERING INFORMATION

MODEL	HEADS	HOUSING COLOR	OPTIONS
LHER	1 2	Single Twin	G Gray TP Tamper-Proof