

Project:	
Type:	
Catalog#:	




Introduction

- The JXY is the latest generation Area Light of FME Lighting, it is highly cost effective, with complete configurations in stock. The JXY delivers 11,000lm to 48000lm lumens, which can replace 250W to 1000W HID luminaires.
- The JXY family includes three different sizes, depending on wattage. Mounting options include slipfitter mount, square or round pole mount, and yoke mounts.
- Other options include: photocells, motion sensors, and glare shields.

Features

- **Optics:** Type III, IV, V distribution available
- **Housing:** Die-cast aluminum - 3G Vibration Rated
- **Finish:** Dark bronze is standard. Options include Black, White, and Grey.
- **Ambient Temperature:** -40° F (-40° C) to 113° F (45° C)
- **Listing :** UL Certified to meet U.S. and Canadian standards. Suitable for wet locations. DesignLights Consortium® (DLC) Premium qualified product.
- **Warranty :** 5-years limited warranty.

Photometric

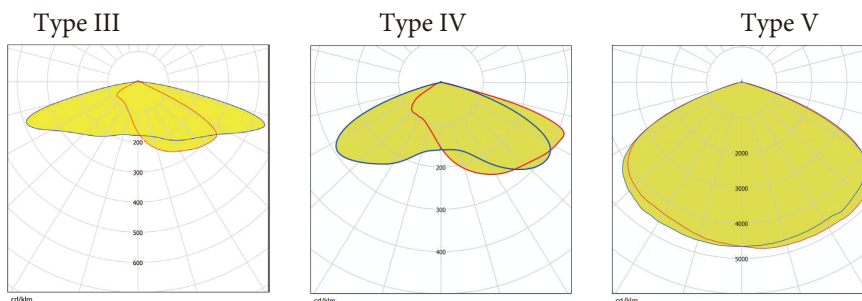

Control Options



Electrical:

- **Voltage:** Universal 120-277VAC. Optional - 277-480VAC input voltage
- **Driver:** Standard with 1-10V dimmable
- **Power Factor:** ≥0.95
- CRI: >70
- **THD:** ≤20%
- **Surge Suppression:** 10KV Surge Protection (Standard)
- **Color Temperature:** 3000K, 4000K, 5000K or 5700K

System Wattage	Voltage	Distribution Type	4000K/5000K/5700K, 70CRI					3000K, 70CRI				
			Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
80W	120-277V	T3	12,240	3	0	3	153	11,077	3	0	3	138
		T4	12,080	3	0	2	151	10,932	3	0	2	137
		T5	12,400	3	0	1	155	11,222	3	0	1	140
	120-347V	T3	12,400	3	0	3	155	11,222	3	0	3	140
		T4	12,240	3	0	2	153	11,077	3	0	2	138
		T5	12,560	3	0	1	157	11,367	3	0	1	142
	277-480V	T3	12,240	3	0	3	153	11,077	3	0	3	138
		T4	12,080	3	0	2	151	10,932	3	0	2	137
		T5	12,400	3	0	1	155	11,222	3	0	1	140
100W	120-277V	T3	15,300	3	0	3	153	13,847	3	0	3	138
		T4	15,100	3	0	2	151	13,666	3	0	2	137
		T5	15,500	3	0	1	155	14,028	3	0	1	140
	120-347V	T3	15,500	3	0	3	155	14,028	3	0	3	140
		T4	15,300	3	0	2	153	13,847	3	0	2	138
		T5	15,700	3	0	1	157	14,209	3	0	1	142
	277-480V	T3	15,300	3	0	3	153	13,847	3	0	3	138
		T4	15,100	3	0	2	151	13,666	3	0	2	137
		T5	15,500	3	0	1	155	14,028	3	0	1	140
150W	120-277V	T3	22,650	3	0	3	151	20,498	3	0	3	137
		T4	22,350	3	0	3	149	20,227	3	0	3	135
		T5	22,950	4	0	2	153	20,770	4	0	2	138
	120-347V	T3	22,950	3	0	3	153	20,770	3	0	3	138
		T4	22,650	3	0	3	151	20,498	3	0	3	137
		T5	23,250	4	0	2	155	21,041	4	0	2	140
	277-480V	T3	22,650	3	0	3	151	20,498	3	0	3	137
		T4	22,350	3	0	3	149	20,227	3	0	3	135
		T5	22,950	4	0	2	153	20,770	4	0	2	138
200W	120-277V	T3	30,400	4	0	4	152	27,512	4	0	4	138
		T4	30,000	4	0	3	150	27,150	4	0	3	136
		T5	30,800	5	0	2	154	27,874	5	0	2	139
	120-347V	T3	30,800	4	0	4	154	27,874	4	0	4	139
		T4	30,400	4	0	3	152	27,512	4	0	3	138
		T5	31,200	5	0	2	156	28,236	5	0	2	141
	277-480V	T3	30,400	4	0	4	152	27,512	4	0	4	138
		T4	30,000	4	0	3	150	27,150	4	0	3	136
		T5	30,800	5	0	2	154	27,874	5	0	2	139
240W	120-277V	T3	36,240	4	0	4	151	32,797	4	0	4	137
		T4	35,760	4	0	3	149	32,363	4	0	3	135
		T5	36,720	5	0	2	153	33,232	5	0	2	138
	120-347V	T3	36,720	4	0	4	153	33,232	4	0	4	138
		T4	36,240	4	0	3	151	32,797	4	0	3	137
		T5	37,200	5	0	2	155	33,666	5	0	2	140
	277-480V	T3	36,240	4	0	4	151	32,797	4	0	4	137
		T4	35,760	4	0	3	149	32,363	4	0	3	135
		T5	36,720	5	0	2	153	33,232	5	0	2	138
310W	120-277V	T3	46,810	4	0	4	151	42,363	4	0	4	137
		T4	46,190	4	0	3	149	41,802	4	0	3	135
		T5	47,430	5	0	2	153	42,924	5	0	2	138
	120-347V	T3	47,430	4	0	4	153	42,924	4	0	4	138
		T4	46,810	4	0	3	151	42,363	4	0	3	137
		T5	48,050	5	0	2	155	43,485	5	0	2	140
	277-480V	T3	46,810	4	0	4	151	42,363	4	0	4	137
		T4	46,190	4	0	3	149	41,802	4	0	3	135
		T5	47,430	5	0	2	153	42,924	5	0	2	138

