

Project:	
Type:	
Catalog # :	

FME Lighting | 877 - 234 - 8460 | info@fmelighting.com



SPECIFICATIONS

Mounting

Ceiling grid mount. Knockouts on both ends permit conduit wiring and / or row mounting.

Housing

Snap-in extruded white (opal) diffuser.

Door

18 gauge cold rolled steel die-formed to shape with seams welded and ground smooth. Stainless steel and 16 gauge aluminum available.

Lens

Electrical components are mounted to a removable power tray for ease of installation and maintenance.

Finish

Polyester powder-coated after phosphate pre-treatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

Driver

0-10Vdc 1% dimming, >0.9 PF, <20% THD
Factory programmable, Operating temp -40°C Min. to 50°C Max


Wiring

Driver provided with pre-wired 3-wire self-aligning input power quick disconnect and 2-wire quick disconnect to LED module.

Certifications

UL Listed wet location. IP43 rated and suitable for use in ISO-3 cleanrooms (209E Class 1).

DIMENSIONS

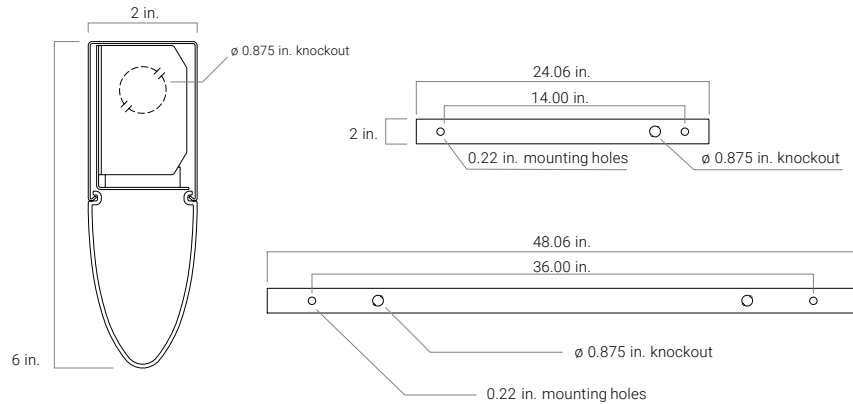


ORDERING INFORMATION

ORDERING GUIDE

Series	Luminary Size	LED Rows	Voltage	CCT	Finish	Material	Mounting	Accessory
CFW	4 = 4 ft. fixture	1	V = Variable, 120-277 V, 50/60Hz	AM = Pure Amber (930LM) PA = Phosphor Amber (2069LM)	W = White: Standard B = Brushed (Stainless Steel Only)	AM = Aluminum CR = Cold Rolled: Standard SS = Stainless Steel	Rmxx*** = Row mounting	CA = Canadian UL Listing EM = Emergency battery backup F = Fuse holder

*- XX= Length of row in feet. (Includes Chase Nipple(s), PVC Gasket(s), and Sealing Locknut(s))

AM - Pure Amber Spectrum

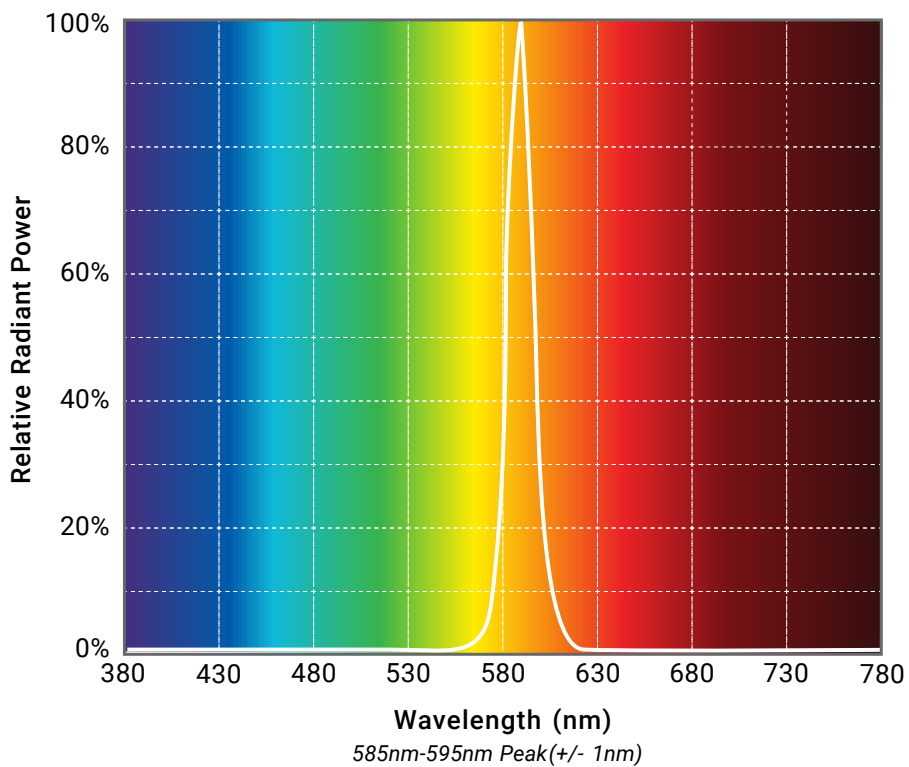

PA - Phosphor Amber Spectrum

