

FKZXTEU Thin Die-Cast LED Exit Sign



Project:	
Type:	
Catalog #:	



STANDARD



ILLUMINATION

- Ultra-bright, energy efficient, long-life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 2.4V long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.


HOUSING

- Premium-grade, aluminum housing (also available in black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Quick-snap face plate closure.
- Specification-grade, low-profile thin aluminum die-cast design.
- Exit sign must be ordered with single or double face configuration only.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations. (0°C – 50°C)

DIMENSIONS

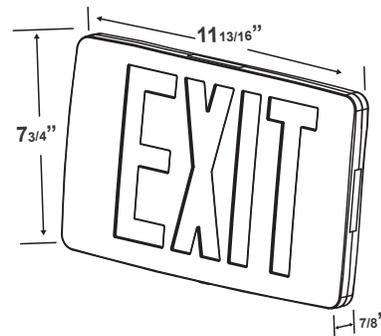

Sample Part Number: **FKZXTEU-1-R-W**

ORDERING INFORMATION

Model	No. of faces	Letter Color	Housing Color	Battery
FKZXTEU	1 Single Face	R Red	W White	Blank AC-Only
	2 Double Face	G Green	B Black A Aluminum	EM Battery Back-up

FKZXTEU Thin Die-Cast LED Exit Sign



Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
FKZXTEU-RED/GREEN/EM	1.0	1.0	0.10	0.10