

Specification

| Model | Dimension | Wattage | CCT | Efficacy | Luminous Flux |
|--------|-----------|---------|-------------|----------|---------------|
| TN3 86 | 6 "X 8' | 80 W | 3500K/4000K | 94 | 7520lm |


Performance Summary

| | |
|-----------------------------|---------------|
| Input Voltage | 100-277V AC |
| Color Rendering Index (CRI) | Ra>80 |
| Power Factor | PF>0.90 |
| Dimming Style | 1-10V Dimming |
| Beam Angle | 112° |
| Mounting | Recessed |
| Warranty | 5 Years |

Regulatory & Voluntary Qualifications


| | |
|------------|-----|
| UL Listed | Yes |
| Damp rated | Yes |

Dimension

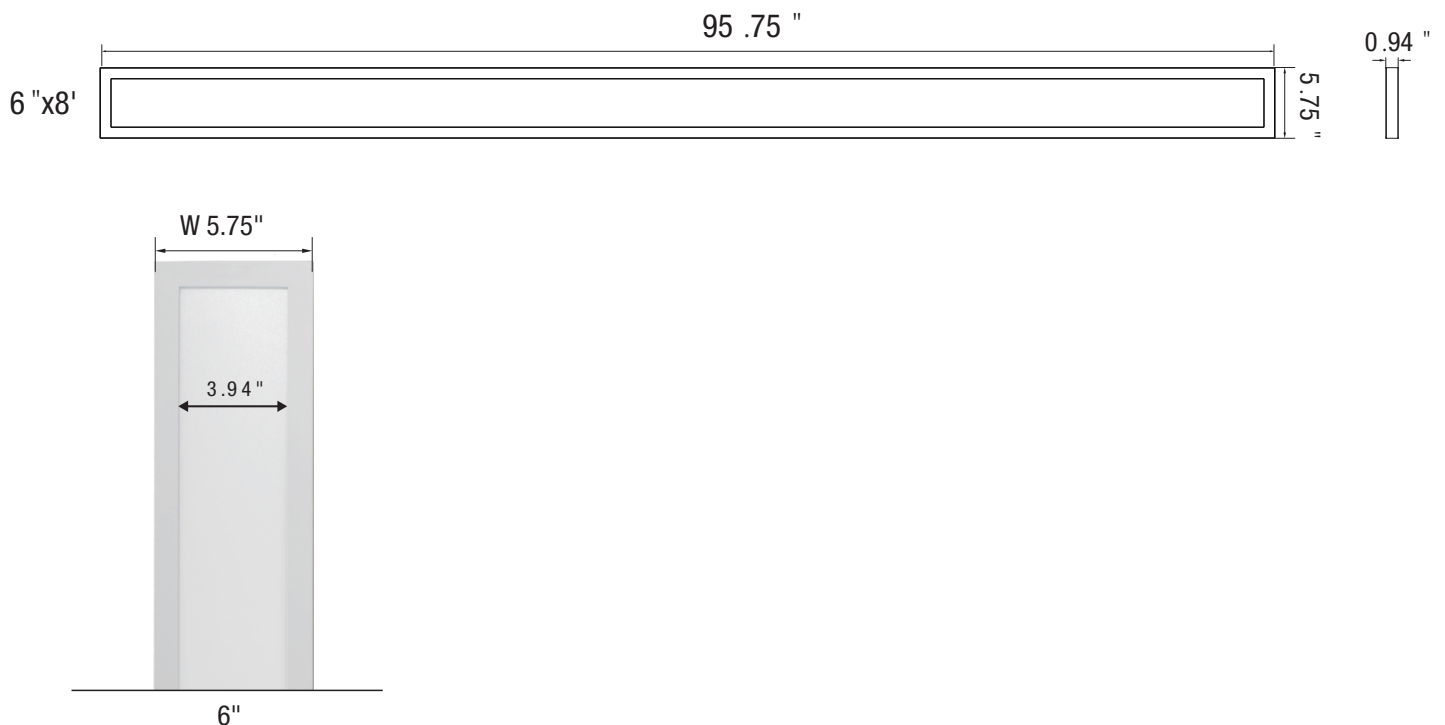

Sample

TN3 8 6 - 4 0F - W S - R M

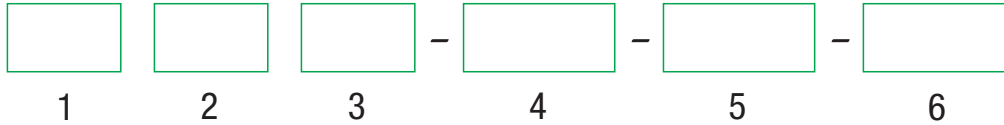

1. Base Model

LS

2. Length

8 8 feet

3. Aperture

6 6 inch

4. CCT (Choose one)

35F 3500K 40F 4000K

5. System Wattage (Choose one)

WS Wattage Selectable (Except for 2ft fixture)

NS Fixed Wattage

6. Mounting Option (Choose one)

SM Surface Mounted

RM Recessed