

LW Series

Vandal Resistant

Garage Lighter



LW-VNGL40Q

Housing:

Die Cast Aluminum Housing, 1/2" Coin Plugs with O-rings for Conduit & Photocell on Sides & Back, Textured Architectural Powdercoat Finish Over a Chromate Conversion Coating

Lens:

Standard Clear Polycarbonate Prismatic Lens

Mounting:

Built-in Template for Mounting to an Electrical Box, or Use 1/2" Surface Conduit, Downrod, or Quick-Mount Bracket.

LumaFit LED:

Array Lumens: 7,805

Delivered Lumens: 7,139 (4K), 7,436 (5K)

CRI: 80+

CCT: 4000K, 5000K

Rated Life: 50,000 Hours

5-Year Warranty

Aluminum Boards

Wattage:

Array: 53.7w, System: 62.3w

Driver:

Electronic Driver, 120-277V, 50/60Hz or 347/480V, 50/60Hz;

Dimmable Driver

Listing & Ratings:

CSA: Listed for Wet Locations

(Damp Locations When Used with VNQM). IP65

Operating Temperatures: -40°C to +40°C

Options:

Surge Protection

Battery Backup


Custom Colors Available Upon Request.



LW Series Vandal Resistant Garage Lighter

Catalog #	Description	
Complete Units		
Ordering Information		
Example:LW-VNGL40QF1X54U5KSZSP		
LW-VNGL40	Model:	LW-VNGL40
Q	LED Mfr:	Q=QSSI
F	Optics:	F=Medium Beam Spread
1X	Number of Arrays:	1X=One
54	Wattage:	54=54w
U	Ballast:	U=120-277V, H=347/480V
5K	CCT:	4K=4000K, 5K=5000K
S	Lens:	S=Standard Clear Polycarbonate Prismatic Lens
Z	Color:	Z=Bronze, W=White
-	Mounting:	N/A
SP	Options:	SF=Single Fuse, DF=Double Fuse, SP=Surge Protection


DIMENSIONS

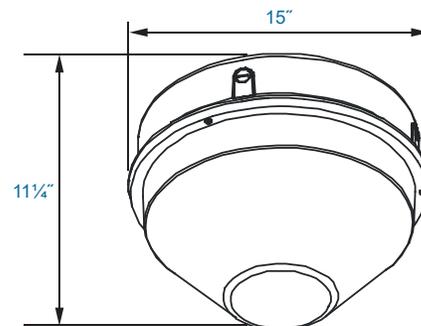

LW-VNGL40Q

FME Lighting
877-234-8460 |
info@fmelighting.com

Catalog #	Description
LW-VNGL40PC	Prismatic Polycarbonate Lens
LW-VNQM	Hinged Quick-Mount Bracket, Stamped Steel, Mount Over Recessed Electrical Box, or Use 3/4" NPS Downrod (Not Supplied) for Pendant Mounting. CSA Listed for Damp Location Mounting.
3EBL1202774500	Battery Backup, Provides 90 Minutes of Backup Power.

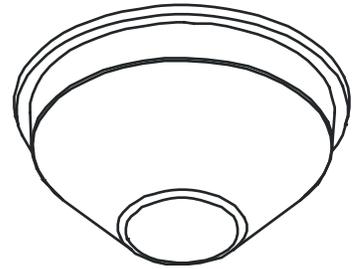


LW-VNGL40PC



LW-VNQM



3EBL1202774500

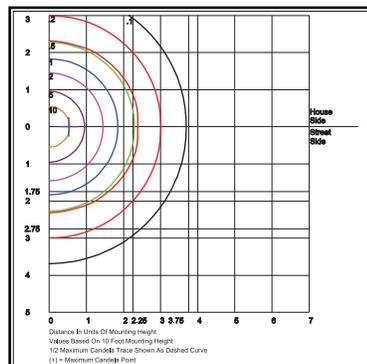

LW-VNGL40QF1X54U5KS