

LED MMA19 LAMP



Project:	
Type:	
Catalog #:	



STANDARD



APPLICATIONS

LED "A" lamps used for any incandescent "A" lamp replacement, long life maintenance free led replacement lamps.

ILLUMINATION

- Long life LEDs with up to 25,000 hours at 70% lumen maintenance.
- Choice of 2700K (± 145), warm light, 4000K (± 275), cool light, color temperature with 80 CRI.
- Produces 800-1100 lumens output from luminaire.
- Uses 1.18W high power, high quality LEDs.

ELECTRICAL

- Dimmable to 10% with most dimmers.

Lutron Maestro C-L	MACL-153MR
Lutron Skylark C-L	SCL-153P
Leviton Sureslide	Cat.No.6674
Lutron	PD-6WCL
Legrand Harmony	HCL453PTCCCV6

- Non-dimmable(No Energy Star).
- Save 75% compared to incandescent sources.
- High efficiency driver with a power factor $\geq .90$ with input power of 120V, 50-60Hz.
- Built-in LED Driver.
- Power consumption of 9 or 12 watts.
- Operation temperature of - 20°C- 40°C (-4°F- 104°F).

MOUNTING

- Easy installation.
- No tools required for installation.


HOUSING

- Durable thermoplastic construction.
- E26 medium screw-base, Edison.

WARRANTY/LISTING

- Tested in accordance with IESNA LM79 & LM80.
- UL Listed for damp location.
- Energy Star qualified.
- Passes FCC Class B.
- Five year warranty on all electronics and housing.

DIMENSIONS

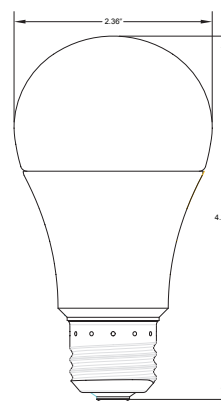

ORDERING INFORMATION

MODEL	WATTS		KELVIN RATING		LUMENS	DIMMABLE OR NON
MMAA19	9W	9 WATTS	27K	2700K	800	DIM
	9W	9 WATTS	4K	4000K	800	DIM
	12W	12 WATTS	27K	2700K	1100	DIM
	12W	12 WATTS	4K	4000K	1100	DIM
MMAKA19	9W	9 WATTS	27K	2700K	800	NON-DIM
	9W	9 WATTS	4K	4000K	800	NON-DIM
	12W	12 WATTS	27K	2700K	1100	NON-DIM
	12W	12 WATTS	4K	4000K	1100	NON-DIM

FME Lighting | 877-234-8460 | info@fmelighting.com

Specifications and dimensions subject to change without notice.