

MMBR SERIES

USE IN RECESS DOWN LIGHTS, TRACK AND
OUTDOOR SECURITY LIGHTS



Project:	
Type:	
Catalog #:	



STANDARD



APPLICATIONS

MMBR20/BR30/BR40 lamps use in recess down lights, track and outdoor security lights. These are long life maintenance free LED replacement lamps.

ILLUMINATION

- Long life LEDs with up to 25,000 hours at 70% lumen maintenance.
- Choice of 2700K (± 145), warm light, 4000K (± 275), cool light, color temperature with 80 CRI.
- Produces 525-1100 lumens output from luminaire.
- Uses 1.18W high power, high quality LEDs.
- 110 Degree beam angle.

ELECTRICAL

- Dimmable to 10% with most dimmers.
- | | |
|--------------------|---------------|
| Lutron Maestro C-L | MACL-153MR |
| Lutron Skylark C-L | SCL-153P |
| Leviton Sureslide | Cat. No. 6674 |
| Lutron | PD-6WCL |
| Legrand Harmony | HCL453PTCCCV6 |
- Save 75% compared to incandescent sources.
 - High efficiency driver with a power factor $\geq .90$ with input power of 120V, 50-60Hz.
 - Built-in LED Driver.
 - Power consumption of 7 or 11 or 15 watts.
 - Operation temperature of -20°C - 40°C (-4°F - 104°F).

MOUNTING

- Easy installation.
- No tools required for installation.


HOUSING

- Durable thermoplastic construction.
- E26 medium screw-base, Edison.

WARRANTY/LISTING

- Tested in accordance with IESNA LM79 & LM80.
- ETL Listed for damp location.
- Energy Star qualified.
- Passes FCC Class B.
- Five year warranty on all electronics and housing.

DIMENSIONS

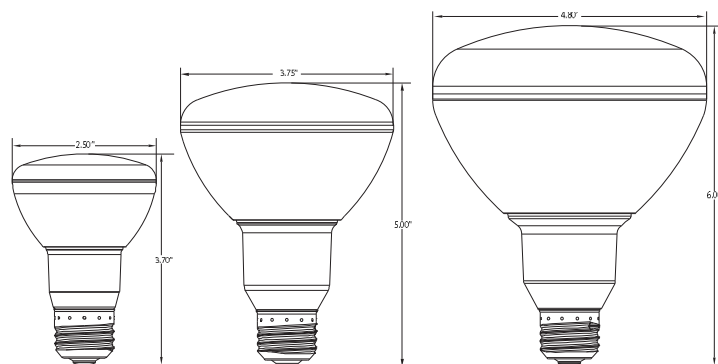

ORDERING INFORMATION

MODEL	WATTS		KELVIN RATING		LUMENS
MMB R20-7W-27K	7W	7 WATTS	27K	2700K	525
MMB R20-7W-4K	7W	7 WATTS	4K	4000K	525
MMBR30-11W-27K	11W	11 WATTS	27K	2700K	800
MMBR30-11W-4K	11W	11 WATTS	4K	4000K	800
MMBR40-15W-27K	15W	15 WATTS	27K	2700K	1100
MMBR40-15W-4K	15W	15 WATTS	4K	4000K	1100

FME Lighting | 877-234-8460 | info@fmelighting.com

Specifications and dimensions subject to change without notice.