

FWLEZXTEU Compact Wet Location LED Exit Sign



Project:	
Type:	
Catalog #:	



STANDARD



OPTIONAL

ILLUMINATION

- Ultra-bright, energy efficient, long-life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Polycarbonate mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- Top and side K/O's provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.


OPTIONS

- SDT: Self-diagnostic test feature performs monthly, biannually, and annually tests to ensure reliable operation and to meet electrical and life safety codes.
- 2C: Dual-circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for wet locations. (-20°C – 50°C)

DIMENSIONS

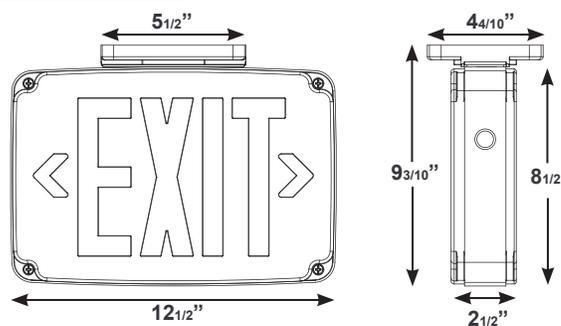

ORDERING INFORMATION

Sample Part Number: **FWLEZXTEU-1-R-W-EM-CW**

Special voltage options available. Check with your Best Lighting Representative.

Model	No. of faces	Letter	Housing	Battery	Options
FWLEZXTEU	1 Single Face	R Red	W White	Blank AC Only	CW Cold Weather (STANDARD)
	2 Double Face	G Green	B Black G Grey	EM Battery Backup	SDT Self Diagnostic TP Tamper-Proof 2C Dual-Circuit

FWLEZXTEU Compact Wet Location LED Exit Sign



Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
FWLEZXTEU-RED/GREEN	2.7	2.7	0.025	0.011
FWLEZXTEU-RED/GREEN/EM/SDT	3.3	3.4	0.030	0.014
FWLEZXTEU-RED/GREEN-2C	2.4	2.4	0.023	0.011