

# XPEMU LED HAZARDOUS LOCATION EMERGENCY UNIT



Project:	
Type:	
Catalog #:	

## STANDARD



## OPTIONAL



## ILLUMINATION

- Two fully adjustable, ultra bright 3.3 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.

## ELECTRICAL

- Powered from low voltage 6V/12V DC power source with low voltage wiring (not provided).

## MOUNTING

- Universal knockout pattern on back provided with gasket for watertight seal for back mount.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

## HOUSING

- Housing is fiberglass reinforced polycarbonate construction in gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- Knockout's provided for conduit feed applications.



## OPTIONS

- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

## WARRANTY / LISTING

- Five year warranty.
- UL listed with approved Best Lighting Products.
- IP66 rated for Ingress protection.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Rated for Class 1, Division 2, Groups A,B,C, & D.

## DIMENSIONS

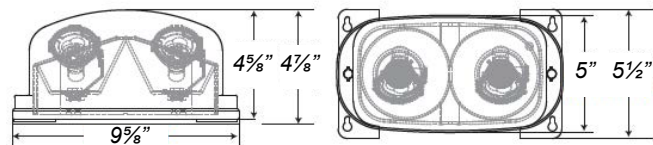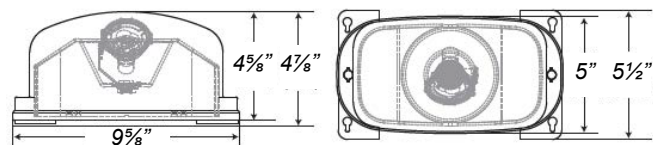

## FIXTURE COMPATIBILITY CHART

Reference individual unit equipment specification sheets for remote load capacity availability.

EZXTEU-RC*	LEDCXTEU-RC*	CXTEU-RC*
CEU-RC	CKXTEURC	LEDR5HO*
E-1-RC	R-16HO*	RMR-16-65/125
TFX-2	DXR	CADXR
NYDXR	LEDCADXR	LEDSDXR627
RMLEDCXTE-RC*	RMCLPU-RC*	INDEMR16
CLPU-RC*	R-5HO*	LEDTFX-2
CAR	CWLEZXTE-RC	INDCWLEZXTE

\* SDT versions of the fixtures are not compatible with the HLRHLED16 remote heads

## ORDERING INFORMATION

Sample Part Number: **XPEMU161G**

MODEL	HEADS	HOUSING COLOR	OPTIONS
XPEMU	1 Single	G Gray	TP Tamper-Proof
	2 Double		

FME Lighting | 877-234-8460 | info@fmelighting.com

Specifications and dimensions subject to change without notice.