

BM Series

20' Gas Station Canopy

IP65



BM-CP20Q

Housing:

Die Cast Aluminum Housing with IP65 Driver Compartment, White Powdercoat Finish Over a Chromate Conversion Coating.

Lens:

Tempered Clear Flat Glass Lens

Mounting:

Recessed Mount

LumaFit LED:

Delivered Lumens: 27,301

CRI: 80+

CCT: 5000K

Rated Life: 50,000 Hours

5-Year Warranty

Aluminum Boards

Wattage:

Array: 185.9w; System: 204w

Driver:

Electronic Driver, 120-277V, 50/60Hz

Dimmable Driver

Listings & Ratings:

CSA: Listed for Wet Locations. IP65

Operating Temperatures: -40°C to +50°C

LM-79 Report Available on Select Models.

Options:

Surge Protection

Custom Colors Available Upon Request.




DesignLights Consortium™ Qualified Luminaires:
CP20QF1X186U5KC**



BM Series 20' Gas Station Canopy

Catalog #	Description	
Complete Units		
Ordering Information		
Example: CP20QF1X186U5KCWSP		
BM-CP20	Model:	BM-CP20
Q	LED Mfr:	Q=QSSI
F	Optics:	F=Type V
1X	Number of Arrays:	1X=One
186	Wattage:	186=186w
U	Ballast:	U=120-277V
5K	CCT:	5K=5000K
C	Lens:	C=Tempered Clear Flat Glass
W	Color:	W=White
-	Mounting:	N/A
SP	Options:	SF=Single Fuse, DF=Double Fuse, SP=Surge Protection

DIMENSIONS

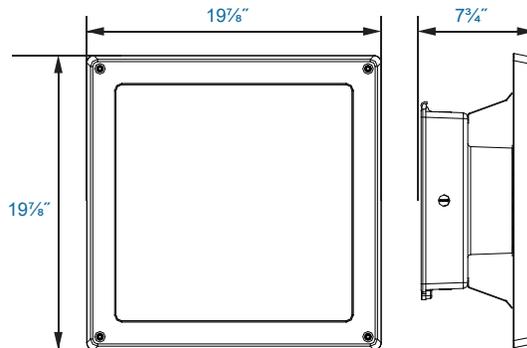

BM-CP20Q

FME Lighting
877-234-8460 |
info@fmelighting.com




BM Series

20' Gas Station Canopy



PHOTOMETRICS

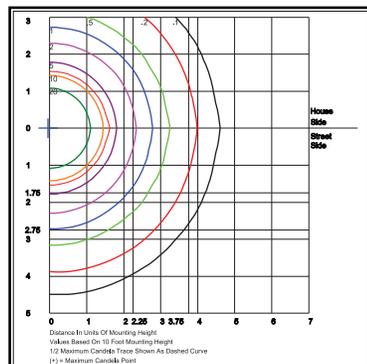

BM-CP20QF1X186U5KC

FME Lighting
 877-234-8460 |
info@fmelighting.com

LD-264

REV. 01-20-17